




# KATO

## SELF PRIMING CENTRIFUGAL PUMP

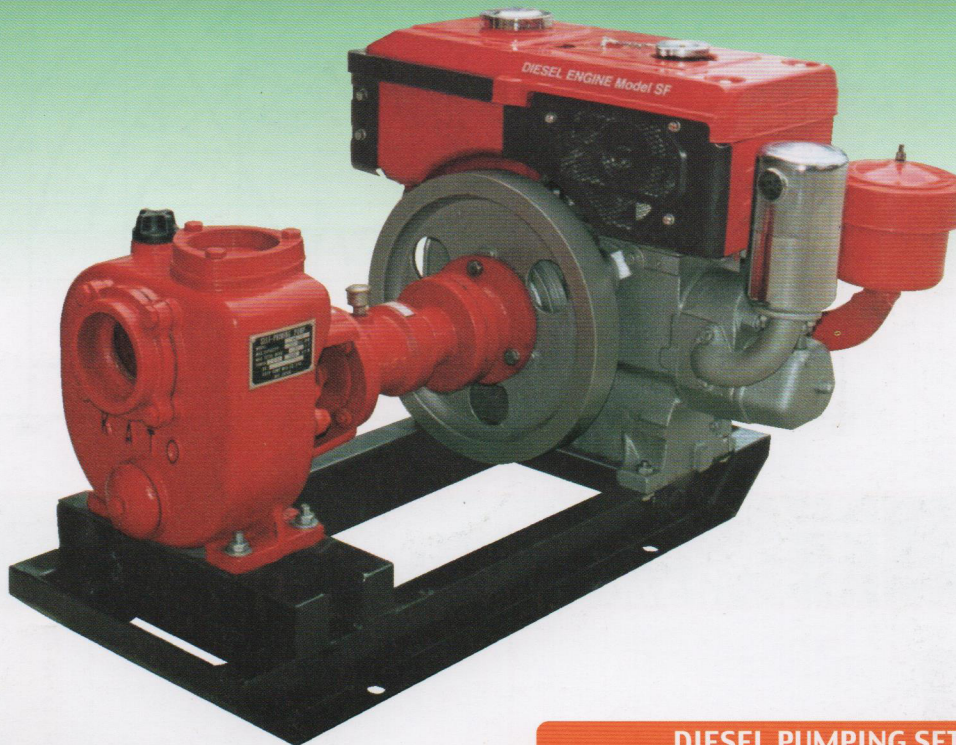

**DIESEL PUMPING SET**

## DIESEL PUMPING SET

**MODEL KMC/KSB**



**KMC/KSB**

### FEATURES :

1. Being SELF-PRIMING Type, No need foot valve or vacuum pump.
2. Adopting DOUBLE VOLUTE CONSTRUCTION, it can be used most economically.
3. Adopting OPEN-TYPE IMPELLER, water runs very smoothly.
4. MECHANICAL SEALING (Ceramic /Tungsten carbide) guarantees no leakage of water and long durable operation.
5. Using GOOD QUALITY of BEARING.
6. Choice of either ANTI-CLOCKWISE or CLOCKWISE DIRECTION.
7. Material : Model KMC- Mild steel shaft with Cast iron impeller.  
Model KSB- Stainless steel shaft with Bronze impeller.

### SPECIFICATIONS

Model		Dia Inch	Suction lift	Total head (Max.)	2000rpm Standard Capacity	Capacity (Max.)	Power Required
KMC	20	2"	23ft (7m)	70ft(21m)	33ft-80U.S.GPM	150U.S.GPM	1-3HP
	25	2 1/2"	23ft (7m)	75ft(22m)	33ft-120U.S.GPM	260U.S.GPM	1.5-4HP
	30	3"	23ft (7m)	85ft(25m)	33ft-200U.S.GPM	380U.S.GPM	3-6HP
KSB	40	4"	23ft (7m)	85ft(25m)	30ft-330U.S.GPM	480U.S.GPM	6-9HP