




High Pressure Self-Priming Centrifugal Pump

เครื่องสูบน้ำหอยโข่งแรงดันสูง

PERFORMANCE CURVE

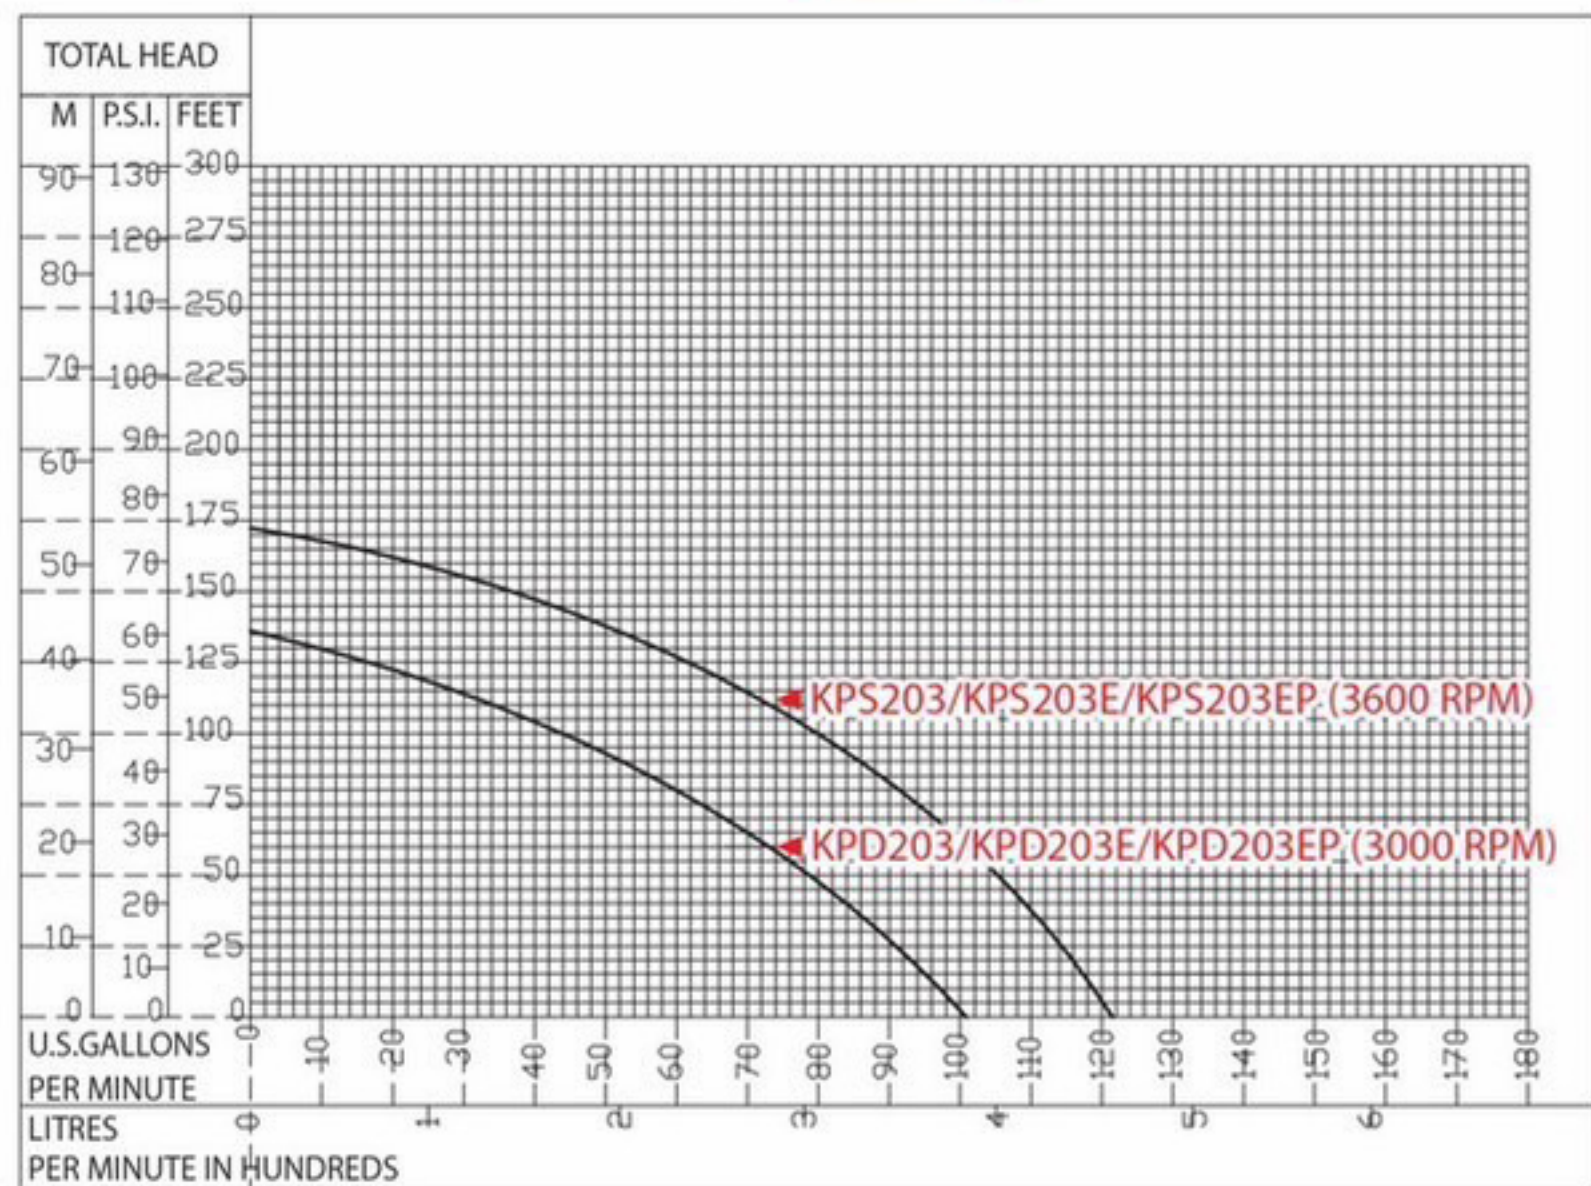


S.T.I. INTERNATIONAL CO.,LTD.



High Pressure Self-Priming Centrifugal Pump

Accessories

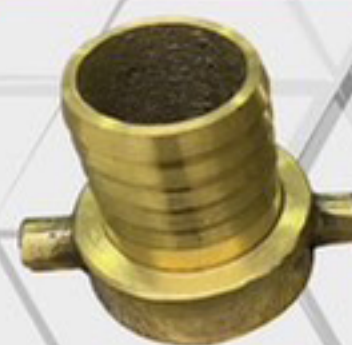

Coupling set

Power Source



Gasoline Engine: SG 65E HONDA Diesel Engine: GX690 Diesel Engine : SM100E Diesel Engine : SM200E

SPECIFICATIONS

	Model	KPS 203TE	KPS 203TEP	KPS 203TEP20	KPD 203TE	KPD 203TEP20
PUMP	Type	High Pressure Centrifugal Pump				
	Impeller	Twin Impeller Type				
	Inlet Dia.	2" (50 mm.)				
	Outlet Dia.	1" (25 mm.) 2 ea. & 1.5" (38 mm.) 1 ea.				
	Max. Pumping Capacity	145 gal/min (550 L/min)			113 gal/min (428 L/min)	132 gal/min (500 L/min)
	Max. Head	295 ft. (90 m.)			239 ft. (73 m.)	295 ft. (90 m.)
ENGINE	Max. Suction Lift	8 m.				
	Model	SG 130E	SG 160E	Honda GX690	SM 100E	SM 200E
	Type	Air Cooled 4 Strokes, Gasoline			Air Cooled 4 Strokes, Diesel	
	Cylinder	Single Cylinder		Twin Cylinders	Single Cylinder	Twin Cylinders
	Max. Output	13HP @ 3600 RPM.	16HP @ 3600 RPM.	22HP @ 3600 RPM.	10HP @ 3000 RPM.	20HP @ 3000 RPM.
	Starting System	Electric & Recoil		Electric Start	Electric & Recoil	Electric Start
	Pump Dimension (mm.)	540 x 660 x 550		590 x 740 x 590	540 x 700 x 550	590 x 740 x 590